

Generic build instructions – Triple Bay log store

Before you commence the assembly process, we recommend that you read these instructions thoroughly beforehand to familiarise yourself with the assembly process and to also check that you have the correct components.

We highly recommend that any assembly is carried out on a flat, level surface if possible and that you use another person to assist you if necessary.

You can check our **YouTube channel** for assemble video, click on the link below:

[Triple Bay wooden log store - assembly video](#)

Package contents:

- 3x Doors (If with doors)
- 2x Side panels
- 3x Back panels
- 1x Base
- 1x Lattice
- 1x Kindling shelf (If bought one)
- 1x Roof
- 4x Centre posts
- 65mm screws
- 85mm screws (For the base only)
- 2x Spacer blocks

Tools required:

Electric screwdriver (No.2 Pozi bit) or
Screwdriver



Step 1



Stand the left-hand end panel (or right hand for the reversed roof version) upright on a flat, level surface.

Step 2



Arrange the 2 spacer blocks on the ground adjacent to the end panel as shown in the photo above. Now place a back panel on the blocks, at 90° to the end panel, aligning the 2 panels ready for fixing.

Step 3



Using the 65mm screws provided, attach the batten on the back panel to the post of the end panel, ensuring that the batten remains vertically aligned to the post.

Step 4



Align one of the longer posts (**shorter for a reversed roof**) with the other end of the back panel. And secure it with the provided screws. Repeat steps 1-4 to complete the rest of the triple log store bays.

Step 5



At this point your assembly should look like this. Please continue to step 6 for fitting in the base.

Step 6




Slide the base into position as shown, ensuring that the centre post and the central cross member of the base are aligned in the middle of the back assembly.

Step 7




Step 8

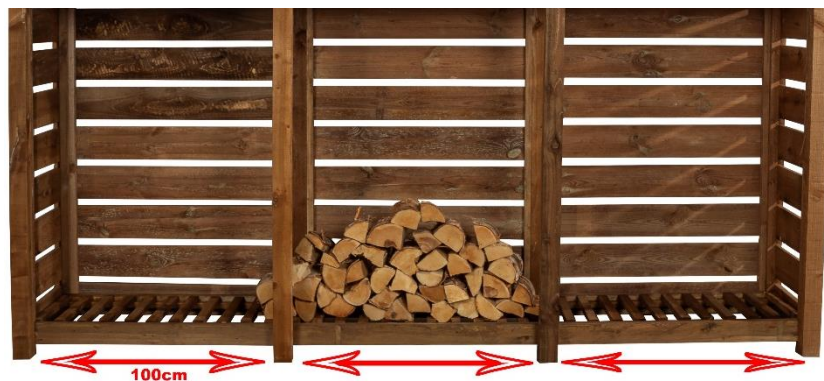

Secure the base with the provided 85mm screws, just as shown in the picture. If you brought a version with a kindling shelf, please continue to steps 8-11; if not, then omit steps 8-11 and continue to step 12

Attach the front posts before fitting the kindling shelf lattice. Please make sure that there would be **one metre gap** between each post before securing it with the screws.

Step 9

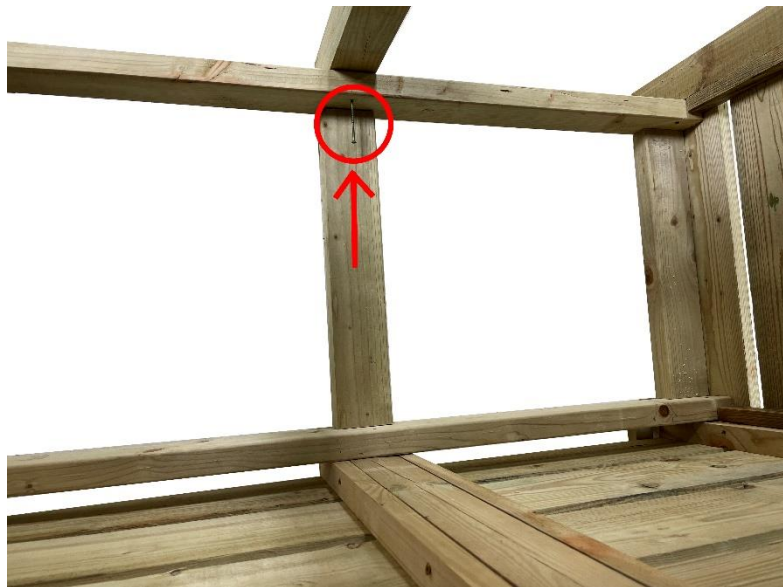

After ensuring that the gap at the bottom is the same as in the top, attach the centre post to the base panel with the provided 80mm screw.

Step 10



Please attach the side braces at your required height on both side panels, secure it with the provided screws and lay the lattice section on top (If you don't have the kindling shelf, please skip this step.)

Step 11



Place the kindling shelf on the braces and attach two last middle support braces in the middle between the front and back central posts using the provided screws, ensuring that the kindling shelf sits at the same level.

Step 12



Carefully place the roof on top of the log store. **(Version without the kindling shelf)**

Step 13




After placing the roof attach the front posts. Please make sure that there would be one metre gap between each post before securing it with the screws. **(The space from the side panel to the central post must equal the back panels)**

Step 14



Check that the batten ends sit flush with the posts as shown. Now attach the roof to each end panel post with 65mm screws. Secure the rear of the roof using provided screws as well.

Step 15

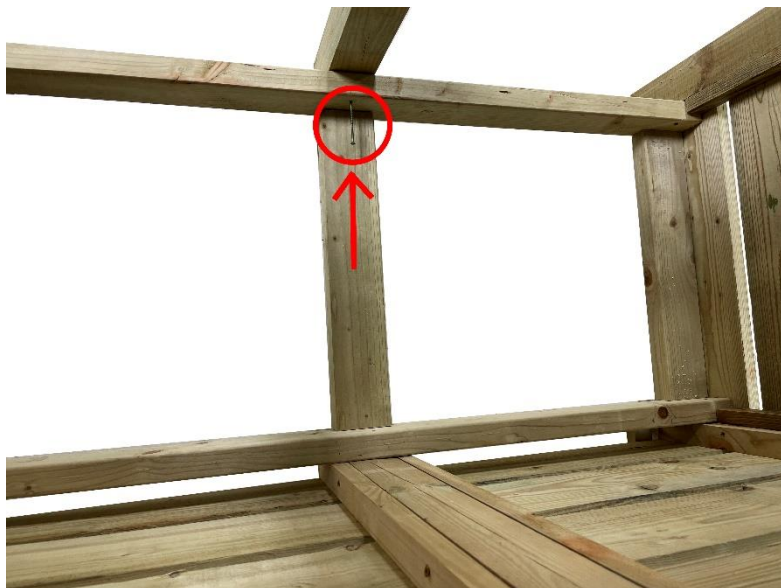

After ensuring that the gap at the bottom is the same as in the top, attach two of the centre posts to the base panel with the provided 80mm screws.

Step 16



Ensure that both centre post sits flush with the roof's batten ends and is secure in place with 2 of the 65mm screws.

Step 17



Your Triple Bay log store is now complete. If you are fitting doors, please proceed with step 16 hinge to the post.

Step 18



Place a spacer block at the front of the log store adjacent to the front-end post and rest the hinge side of the appropriate door on the block, aligning it vertically and horizontally for a good fit. Now use four of the supplied black hinge screws to affix the hinge to the post.

Step 19




Align the top hinge in place, ensuring that the gap between the door and post is consistent at the top and bottom, then secure the top hinge in place using more of the black hinge screws.

Step 20



Fit the hook to the opposite side of the doors from the hinges to whichever height is the best for you with 2x black screws. Don't forget to attach the provided batten to the other side of the doors while screwing in the black screws to hide the pointy screw end's sticking out of doors.

Step 21

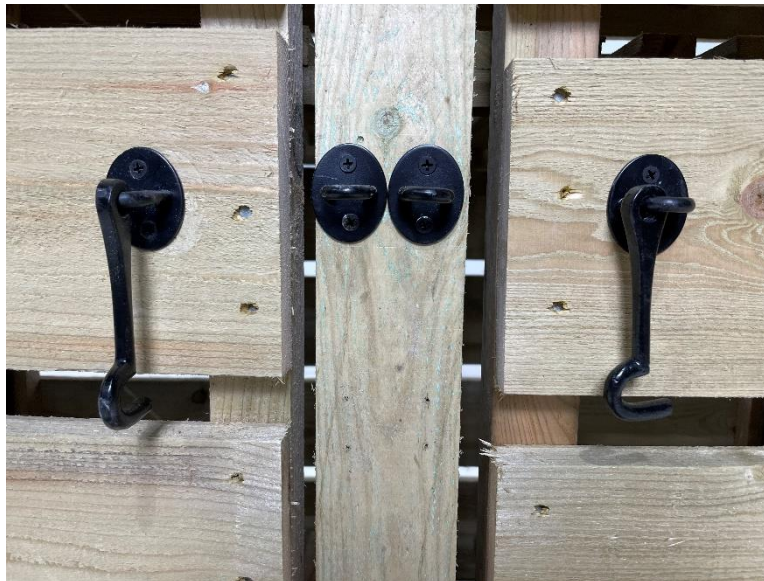

To fit the latch keeper plate, shut the door and hold the latch in the horizontal position. Now fit the keeper and mark its correct fixing position on the post using a pencil or bradawl before securing it in place using the screws provided.

Step 22



Your slatted Triple Bay log store with doors is now completed!

Your Slatted Triple Bay log store is now completed!

We hope that you found your product quick and easy to assemble but if not and you require further assistance or have any questions you can contact us via details above.

Also, you can check our **YouTube channel** for assemble videos, click on the link below:

<https://www.youtube.com/watch?v=z-XDsxNk50g&t=282s>

Or

Type in YouTube search box Arbor Garden Solutions.